


IQ Battery 5P

The IQ Battery 5P all-in-one AC-coupled system is powerful, reliable, simple, and safe. It has a total usable energy capacity of 5.0 kWh and includes six embedded grid-forming microinverters with a continuous power rating of up to 3.84 kVA. It provides backup capability, and installers can quickly design the right system size to meet the customer needs.



Key specifications	IQBATTERY-5P-1P-ROW
Rated (continuous) output power	3.84 kVA
Nominal voltage range	230 VAC/211–264 VAC
Rated output current	16.7 A
Interconnection	Single-phase
Nominal frequency range	50 Hz/47–53 Hz
Usable capacity	5.0 kWh
Ambient operating temperature range (charging)	–20°C to 50°C (–4°F to 122°F) Non-condensing
Ambient operating temperature range (discharging)	–20°C to 55°C (–4°F to 131°F) Non-condensing
Chemistry	Lithium iron phosphate (LFP)
Mounting	Wall-mount or pedestal-mount (sold separately)

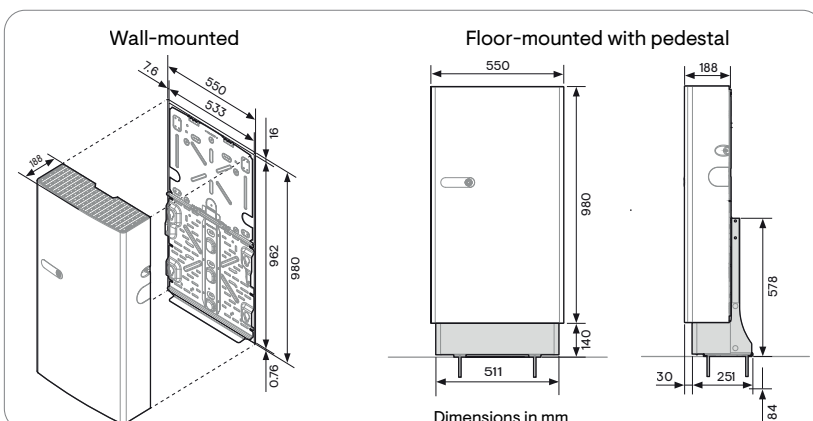

Powerful

- Provides up to 3.84 kVA continuous and 7.68 kVA peak power
- Includes six embedded IQ8D-BAT Microinverters

Reliable

- 15-year limited warranty
- Passive cooling with no moving parts or fans
- Wired communication for stable and fast connection
- Remote software and firmware updates

Simple

- Integrated AC battery system
- Quick installation and commissioning
- Supports Backup, Self-Consumption, and time-of-use (TOU) savings mode and is VPP ready
- CEC listed product and battery rebate approved
- Remote monitoring via the Enphase App
- Field replaceable components

Safe

- Evaluated to UL 9540A, the highest industry standard for battery safety
- Uses lithium iron phosphate (LFP) chemistry for safety and longevity

Model number	
IQBATTERY-5P-1P-ROW	The IQ Battery 5P system with integrated IQ Microinverters and battery management system (BMS) with battery controller
Limited warranty	
IQ Battery 5P unit	>60% capacity, up to 15-year or 6,000 cycles ¹
Output (AC)	@230 VAC ²
Rated output apparent power	3.84 kVA
Peak output current	7.68 kVA (3 seconds), 6.14 kVA (10 seconds)
Nominal voltage/range	230 VAC/211–264 VAC
Nominal frequency/range	50 Hz/47–53 Hz
Rated output current	16.7 A
Peak output current	33.4 A (3 seconds), 26.7 A (10 seconds)
Power factor (grid-tied)	0.8 leading ... 0.8 lagging
Power factor (off-grid)	1.0 leading ... 1.0 lagging
Maximum short-circuit current	32 A _{rms} 3 cycles
Peak short-circuit current	488 A _{rms} for 12 μs
Maximum output overcurrent protection	20 A per unit
Inverter topology	Isolated (HF transformer)
Interconnection	Single-phase
Protection class	I
Overvoltage category	III
AC round-trip efficiency ³	90%
Battery	
Usable capacity ⁴	5.0 kWh
DC round-trip efficiency	96%
Nominal DC voltage	76.8 V
Ambient operating temperature range (charging)	–20°C to 50°C (–4°F to 122°F) non-condensing
Ambient operating temperature range (discharging)	–20°C to 55°C (–4°F to 131°F) non-condensing
Optimum operating temperature range	0°C to 30°C (32°F to 86°F)
Chemistry	Lithium iron phosphate (LFP)
Mechanical data	
Dimensions (H × W × D)	980 mm × 550 mm × 188 mm (38.6 in × 21.7 in × 7.4 in)
Lifting weight	66.3 kg (146.1 lb)
Total installed weight	78.9 kg (174 lb)
Enclosure	Outdoor–IP55
IQ8D–BAT Microinverter enclosure	Outdoor–IP67
Cooling	Natural convection

¹ Whichever occurs first. Restrictions apply.

² Supported in both grid-tied and backup/off-grid operations.

³ AC to the battery to AC at 50% power rating at 25°C.

⁴ Usable capacity is the maximum kWh of discharge capacity from the battery across all system operating modes. Reserved capacity is the partial battery capacity reserved for off-grid usage, and is not available while the system is grid-connected. It is a user-settable value and can be set via the Enphase App. Very low state-of-charge (VLS) is the battery shutdown level or the capacity at which the battery stops operating. It is a user-settable value that can be set via the capacity of the battery below the VLS level is used to automatically restart during daylight hours to recharge the batteries with solar power.

Mechanical data	
Altitude	Up to 2,000 meters (6,562 feet)
Mounting	Wall-mount or pedestal-mount (sold separately)
Features and compliance	
Compatibility	Compatible with IQ Series and S Series Microinverters. The IQ System Controller 3 INT is required for grid-tied and backup operation.
Communication	Wired control communication
Services	Backup, Self-consumption, and time-of-use (ToU) savings mode and is VPP ready
Monitoring	Enphase Installer Platform and Enphase App monitoring options; API integration
Compliance	Performance: AS/NZS 4777.2:2020 + A2 Safety: AS IEC 62040.1, EN IEC 62109-1, EN IEC 62109-2, AS IEC 62619, UN 38.3 EMC: EN 50065-2-2, IEC 61000-3-2, IEC 61000-3-3, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-11, IEC 61000-6-2
What's in the box	
IQ Battery 5P unit	IQ Battery 5P unit (B05-T02-ROW00-1-2)
ID cover and conduit cover	IQ Battery 5P cover with two conduit covers for the left and right sides of the unit
Bottom mounting bracket and top shield	Bottom mounting bracket for mounting the battery on the wall and one top shield
M5 seismic screws	Two M5 seismic screws for securing the battery unit on the bottom mounting bracket
M4 grounding screws	Two M4 grounding screws for securing the top shield on the bottom mounting bracket
M5 ID cover grounding screws	Two M5 ID cover grounding screws for the EMI/EMC requirement
Cable ties	Six cable ties for securing field cables to the unit
Control (CTRL) connector	Spare CTRL connector without resistor for CTRL wiring
Control (CTRL) connector with resistor	Spare CTRL connector with resistor for CTRL wiring
Quick install guide (QIG)	QIG for IQ Battery unit installation instructions
Accessories and replacement parts	
IQ8D-BAT-RMA	IQ8D-BAT Microinverter for field replacement
B05-T02-ROW00-1-2-RMA	IQ Battery 5P battery unit for field replacement
B05-CX-0550-O	IQ Battery 5P cover for field replacement
B05-PM-0550-O	IQ Battery 5P Pedestal Mount
B05-CP-096-O	IQ Battery 5P conduit plates for field replacement. Includes one left-side and one right-side conduit plate
B05-WB-0543-O	IQ Battery 5P wall bracket for field replacement. Includes one bottom mounting bracket and one top shield
IQBATTERY-HNDL-5	IQ Battery 5P Lifting Handles. Includes one left-side and one right-side lifting handle
B05-ACFB-080-O	IQ Battery 5P AC filter board for field replacement
B05-BMSNA-0490-O	IQ Battery 5P BMS board for field replacement
B05-CANB-063-O	IQ Battery 5P control communication board for field replacement
B05-RICS-0524-O, B05-RUCS-0524-O	IQ Battery 5P control switch is preinstalled on the wiring cover for field replacement

Assembled in China

Manufacturer: Enphase Energy Inc., 47281 Bayside Pkwy., Fremont, CA, 94538, United States of America, PH: +1 (707) 763-4784

Importer: Enphase Energy Aust. Pty/Ltd., 88 Market St., South Melbourne VIC 3205, PH: +61 3 86691679

Revision history

Revision	Date	Description
DSH-00020-5.0	June 2025	Updated the data sheet to specify CEC listing and battery rebate ready.
DSH-00020-4.0	May 2025	<ul style="list-style-type: none">Updated the data sheet as per the latest publishing standards.Updated grid compliance information.
DSH-00020-3.0	March 2024	Editorial updates.
DSH-00020-2.0	October 2023	<ul style="list-style-type: none">Added battery isometric view on the first page.Editorial updates.
DSH-00020-1.0	May 2023	Initial release.